

**DESCRIPTION**

SureSlope™ CKT Pre-Cut Crickets are produced with a closed-cell polyisocyanurate (polyiso) foam core integrally bonded to non asphaltic, glass fiber reinforced organic felt facers.

The dimensionally stable SureSlope™ CKT provides a standardized, pre-fabricated cricket solution.

**FEATURES & BENEFITS**


- Available with ACFoam®-II Facer Technology
- Hinged Triangular One-Piece Pre-Cut Tapered and Fill Panels
- Standardized 3:1 (length:width) Ratio
- Slope: 0.5" per ft & 0.25" per ft
- Fully Compatible with Standard 4'x4' Tapered Panels
- Used in Built-Up (BUR), Modified Bitumen, Ballasted Single-Ply, Mechanically Attached Single-Ply and Adhered Single-Ply Roofing Systems

**SUSTAINABILITY**

Atlas polyiso insulation is manufactured using environmentally responsible processes and formulations.

- Contains no CFCs, HCFCs or HFCs
- Zero Ozone Depletion Potential (ODP)
- Negligible Global Warming Potential (GWP)
- GREENGUARD Gold Certification
- Contributes to LEED credits

For more information visit [roof.atlasrwi.com/about-roof/sustainability](http://roof.atlasrwi.com/about-roof/sustainability)

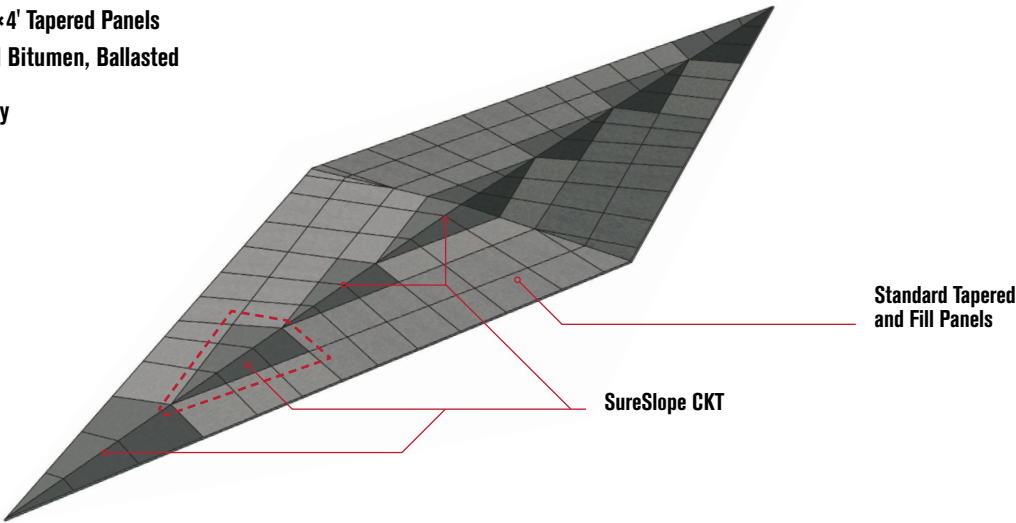

**INSTALLATION**



SureSlope™ CKT Pre-Cut Cricket shall be kept dry before, during and after installation. This product will burn if exposed to an ignition source of sufficient heat and intensity. Do not apply flame directly to SureSlope™ CKT Pre-Cut Cricket insulation. Refer to product packaging, Atlas Technical Bulletin #12 and PIMA Technical Bulletin #109 for storage and handling recommendations.

**THERMAL DATA & DIMENSIONS**

PANEL	THICKNESS			AVERAGE LTTR VALUE	*RSI	PRODUCT DIMENSIONS		PIECES PER PACKAGE
	MIN	MAX	AVERAGE			WIDTH	LENGTH	
X	0.5" (12.7mm)	1.5" (38.1mm)	1.0" (25.4mm)	5.7	1.00	4' (1,220mm)	12' (3,658mm)	4
Y	1.5" (38.1mm)	2.5" (63.5mm)	2.0" (50.8mm)	11.4	2.01	4' (1,220mm)	12' (3,658mm)	2
Q	0.5" (12.7mm)	2.5" (63.5mm)	1.5" (38.1mm)	8.6	1.51	4' (1,220mm)	12' (3,658mm)	2
2"	2.0" (50.8mm)	2.0" (50.8mm)	2.0" (50.8mm)	11.4	2.01	4' (1,220mm)	12' (3,658mm)	2

\*RSI is the metric expression of R-value (m2 • K/W).

**TYPICAL CROSS SECTIONS**

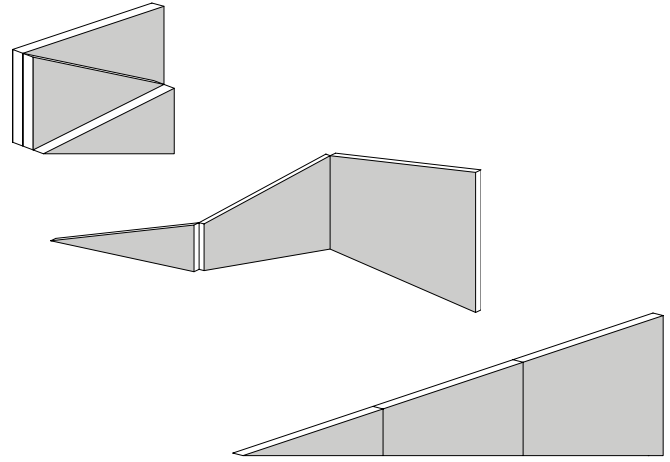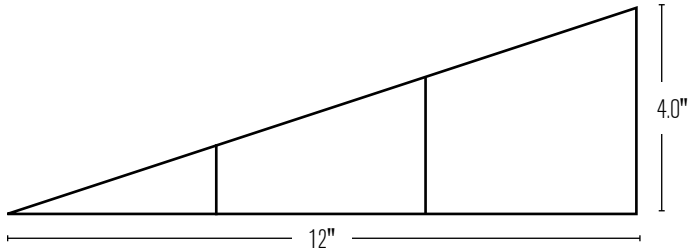

**WARRANTY**

SureSlope is backed by a Limited 20-Year Thermal Warranty. For complete terms and conditions, visit [roof.atlasrwi.com/warranty](http://roof.atlasrwi.com/warranty)

**FOR A COMPLETE LIST  
OF PRODUCT SIZES,  
SCAN OR CLICK QR CODE  
TO DOWNLOAD THE  
PACKAGE & LOADING GUIDE**



Other than the aforementioned representations and descriptions, Atlas Roofing Corporation (hereafter, "Seller") makes no other representations or warranties as to the insulation sold herein. The Seller disclaims all other warranties, express or implied, including the warranty of merchantability and the warranty of fitness for a particular purpose. Seller does, however, have a limited warranty as to the LTTR-Value of the insulation, the terms of which are available upon request from the Seller. Seller shall not be liable for any incidental or consequential damages including but not limited to the cost of installation, removal, repair or replacement of this product. Buyer's remedies shall be limited exclusively to, at Seller's option, the repayment of the purchase price or resupply of product manufactured by Atlas in a quantity equal to that of the nonconforming product. Atlas distributors, agents, salespersons or other independent representatives have no authority to waive or alter the above limitation of liability and remedies.



**Atlas Roofing Corporation**  
2000 Riveredge Parkway, Suite 800 • Atlanta, GA • 30328  
844-641-1402 • [roof.atlasrwi.com](http://roof.atlasrwi.com)

